
### **C941DP and C931DP**



# The perfect combination of finesse and brawn — with professional quality color

- Single Pass Color<sup>™</sup> digital technology: straightthrough print path handles card stock up to 360 gsm
- Designed for short-run production:
   High-Capacity Feeder holds up to 500 envelopes or
   4,000 sheets of bond paper
- High-productivity print speed: up to 50 letter-size pages per minute
- Print white text/graphics on dark media using the 5-color OKI® C941DP printer
- Optional external RIP: processes complex jobs with ease and offers expanded color management
- 1-Year On-Site warranty (U.S. and Canada only)

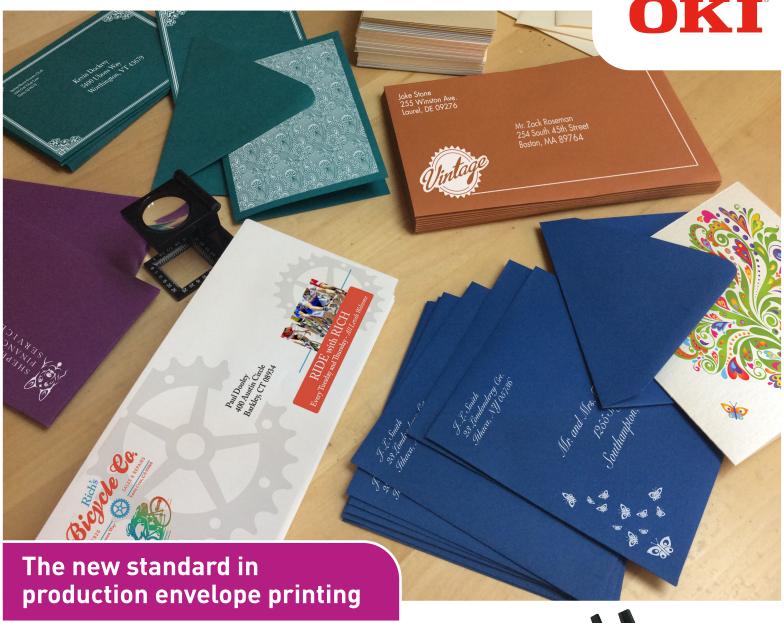

## **C900 Series Envelope Print System**

#### **Specifications**

Model		C941DP	C931DP
Performance		5-Color Digital LED	4-Color Digital LED
Print Speed <sup>1</sup>	CMYK/Mono	Up to 50 ppm Letter, 27 ppm Tabloid	
	CMYK + White	Up to 45 ppm Letter, 24 ppm Tabloid	N/A
	CMYK + Clear	Up to 17 ppm Letter	N/A
Duty Cycle		300,000 pages	
Print Quality	Resolution	Up to 1200 x 1200 dpi; ProQ 1200 x 600 x 16 levels	
Memory	RAM (Standard/Max)	2 GB	
	Processor	1.2 GHz ARM CPU	
Compatibility	Printer Languages	Adobe <sup>®</sup> PostScript 3 <sup>™</sup> , PCL <sup>®</sup> 6, PCL 5c, XPS <sup>®</sup>	
	Connectivity	High-speed USB 2.0, 10 Base-T/100 Base-TX/1000 Base-T Ethernet	
	Operating Systems	Windows® 8, Windows 7, Windows Vista®, Windows XP, Windows Server 2012, Windows Server 2008, Windows Server 2008 R2, Windows Server 2003; Mac® OS 10.3.9 – 10.9	
	Network Protocols	TCP/IP, EtherTalk	
Color Features/ Solutions		OKI's PostScript®driver supports trapping; Embedded ICC Profile-based workflow; Simulations for SWOP, ISO Coated, Japan Color; PDF Direct Print; PS Gamma Adjust; and Color Correct	
		Optional Harlequin® MultiRIP™ external RIP/PC with DirectPrint™	
Media Handling	Media Sizes	Paper Trays: Tabloid extra (12" x 18"), Tabloid (11" x 17"), Legal, Letter, Executive, 3" x 5" Index cards, A3, A4, A5, A6, B5, C5, DL, Com 10, Monarch envelopes.	
		Feeder: 3" x 5" Index cards, Letter, Executive DL, Com 9, Com 10, Monarch, Up to 10" x 13" envelopes max	
	Media Weight	Trays 1 & 2 and optional High-Capacity Feeder: 52–320gsm; Multi-purpose Tray/Feeder: 52–360gsm	
Media Capacity	Multi-purpose Tray/Feeder	Up to 4,000 letter-size sheets/500 Com-10 envelopes	
	Trays 1 & 2	Up to 530 sheets each	
	High-Capacity Feeder (Optional)	Up to 1,590 sheets (3 trays, 530 sheets each)	
Media Output		Face Down: max 610 sheets; Face Up: 500 envelopes via Stacking Conveyor	
Environmental	Size (WxDxH)	Printer: 27.5" x 24.6" x 25.2" (699 mm x 625 mm x 640 mm) Printer/Feeder/Conveyor: 102" x 24.6" x 59.4" (2,591 mm x 625 mm x 1,508 mm)	
	Weight	Printer: 244.4 lb. (110.8 kg) including consumables	Printer: 215.2 lb. (97.6 kg) including consumables
		Feeder: 95 lb. (43.1 kg); Conveyor: 76 lb. (30.4 kg)	
	Temperature/Humidity	50° – 90° F (10° – 32° C) / 20% – 80% RH	
	Power Consumption	Printer: Active 1600W max. /1100W avg.; Standby avg. 40W; PowerSave mode 30W or less; Sleep mode 4W or less; Auto Shutoff 0.4W or less. Feeder/Conveyor: 360W max.	
	Noise Levels	Printer: Active 57dBA or less; Standby 34dBA or less; PowerSave mode – Inaudible	
Options	Accessory (Part Number)	530-Sheet 2nd Tray (45530702); High-Capacity Feeder w/caster base (45530802); 160 GB Hard Disk Drive (44622302)	
Warranty	Limited	1-Year On-Site³; 5-Year Digital LED Printheads	
Product	Description	Part Numbers	
C931DP	4-Station Envelope Press	91690701 (120V)	
C941DP	5-Station Envelope Press	91691301 (120V)	
Spot Color Kits (C941DP only)	White Spot Color Kit Clear Spot Color Kit	45531302 NOTE: Either a White or Clear Kit must be purchased along with C941DP model. Required for operation. —	
Toner Cartridges	C931DP/C941DP (38,000 pgs.²)	Cyan – 45536515; Magenta – 45536514; Yellow – 45536513; Black – 45536516	
	C941DP (10,000 pgs. <sup>4</sup> ) C941DP (20,000 pgs. <sup>4</sup> )	White - 45536405 Clear - 45536406	
Image Drums	C931DP/C941DP (40,000 pgs.5)	Cyan – 45103727; Magenta – 45103726; Yellow – 45103725; Black – 45103728	
Wasta Tanar Par	C941DP (20,000 pgs. <sup>5</sup> )	White - 45103729; Clear - 45103730	
Waste Toner Box	Approx. 40,000 pages <sup>5</sup>	45531502	
Fuser	Approx. 150,000 pages <sup>5</sup>	45531112 (120V)	
Transfer Belt	Approx. 150,000 pages <sup>5</sup>	45531212	

Specifications are subject to change without notice.





#### OKI DATA AMERICAS, INC.

#### USA

2000 BISHOPS GATE BLVD.
MOUNT LAUREL, NJ 08054-4620
TEL: 800.0KI.DATA (800.654.3282)
FAX: 856.222.5320

#### CANADA

4140B SLADEVIEW CRESCENT UNITS 7 & 8 MISSISSAUGA, ONTARIO L5L 6A1 Tel: 905.608.5000 FAX: 905.608.5040

WWW.OKIDATA.COM



© 2014 Oki Data Americas, Inc. OKI Reg. T.M., M.D., Oki Electric Industry Co., Ltd. 5+ Color logo T.M., Oki Data Americas, Inc. Adobe Reg. T.M., PostScript 3 T.M., Adobe Systems, Inc. PCL Reg. T.M., Hewlett-Packard Co. Windows, Windows Vista Reg. T.M., Microsoft Corp. XPS Reg. T.M., Dell, Inc. Mac Reg T.M., Apple Inc. Harlequin Reg. T.M., MultiRIP, DirectPrint, T.M., Global Graphics Software Ltd. ENERGY STAR Reg. T.M., US EPA.

Printed in the USA MS16115-0914

<sup>&</sup>lt;sup>1</sup> Published performance results based on laboratory testing. Individual results may vary.

<sup>&</sup>lt;sup>2</sup> Based on ISO/IEC 19798.

<sup>&</sup>lt;sup>3</sup> Available in the U.S. and Canada only.

<sup>&</sup>lt;sup>4</sup> Based on 5% coverage of letter-size sheet, simplex.

<sup>&</sup>lt;sup>5</sup> Estimated life based on 3 pages per job (single sided letter-size, long-edge feed).